

FMT-100WT

Digital Force Gauge for terminal connections

Features

- For tensile strength testing of wire terminals in accordance with BS, EN, DIN, IEC, UL, SAE and MIL standards
- Simple to use with automatic peak value recording, very high accuracy and reproducibility of measurement results
- Battery operation possible using integrated NiCd-accumulator (rechargeable)
- Solid design for quality control applications in laboratories and in production facilities



Details



This instrument is designed for measuring tensile strength of soldered or solder-free cable joints with end sleeves, pins, solder pins or similar wire terminal components.

With its measuring range of 0...500N it is possible to test wires with cross sections between 0,05mm² (AWG 30) and 10mm² (AWG 8).

Test samples are inserted into the receptacle adaptor, which has 12 different slot widths (from 0.5mm to 6.0mm), covering all the prevalent wire strengths and terminal types. The traction force is applied by an easy gliding lever system which simultaneously clamps the wire and creates a consistent pull with minimal effort.

The traction force is collected at an accuracy of +/-0,5% and is shown on the display at a resolution of 0,1N. The peak value, at which the cable is torn, will be automatically saved in the memory.

Achtung! Nicht mehr lieferbar.

Attention! No longer available.

Attention! N'est plus disponible.


¡Precaución! Ya no está disponible.

Attenzione! Non più disponibile.

Alluris GmbH & Co. KG | Basler Straße 65 | D-79100 Freiburg

Fon: +49 (0)761 47979 30 | Fax: +49 (0)761 47979 44

Order Info

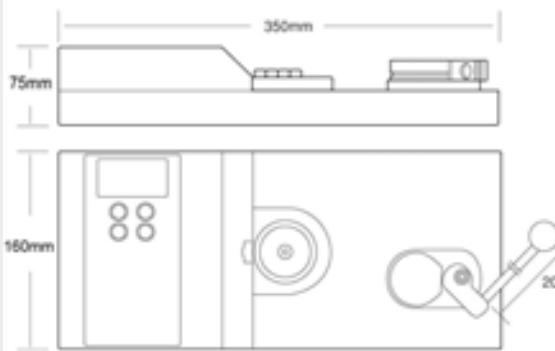

FMT-100WT

Instrument with terminal adapter and easy-glide clamp and pull lever assembly, universal AC-adaptor /-charger and operation manual.

FMT-110 WT

as above, subject additional RS232-Interface and appropriate connection cable for serial I/O port (9p-D-Sub).

Spec

FMT-100WT

FMT-110WT

| Measuring Range | 0,0...500,0 N | | |
|-------------------|--------------------------|--|--|
| Wire Diameter | Terminal adapter width | 0,5 0,8 1,0 1,3 1,5 2,0 2,5 3,0 3,5 4,0 5,0 6,0 mm | |
| | Clamping device | 0,1 ... 6,0 mm (continuously variable) | |
| | Dia. range IEC 60352-2 | Cross section 0,05 ... 10 mm ² (AWG8...30) | |
| | Dia. range SAE AS7928 II | AWG 12 ... 28 | |
| Resolution | | 0,1 N | |
| Accuracy | @ 23°C (F.S.) | +/- 0,5% (+/- 1/2 digit) | |
| | Tk | automatic ally readjustment while starting | |
| Operation Mode | Standard | displays the actual value in N kgf lbf | |
| | Peak | displays the peak value in N kgf lbf | |
| Overload | max. admissible | 200 % (F.S.) alarm at 120% (F.S.) | |
| | Type | LCD, 4-digit, 12mm high | |
| Display | Update time (Standard) | 1000 msec 500 msec 333 msec 200 msec 100 msec 50 msec (selectable) | |
| | Update time (Peak) | 1 msec | |
| Memory | | Peak value | |
| Power Supply | Type | internal NiCd-battery (up to 12h) AC-adapter /-charger 100...240VDC (50Hz) | |
| Interface | RS232C | without | Baud rate selectable 2,4 kB 4,8 kB 9,6 kB 19,2 kB |
| | Analogue output | without | -1 ... 0 ... +1 VDC |
| Temperature Range | Operation | 0° ... 40° C | |
| | Storage | -20° ... 60° C (rF < 80%) | |
| Protection Code | | IP 40 | |
| Weight | | app. 14 kg | |
| Dimensions | LxWxH (without lever) | 350 x 160 x 65 mm | |
| Housing Material | | anodised aluminium, surface tempered steel , stainless steel V2A | |